

B-LinkU

2 port basic rate ISDN network simulator

ISDN Wherever you need it!


- Simulate two independent ISDN lines on your desktop.
- Connect to each port via the U or S/T interface.
- Allows simple testing and demonstration of ISDN customer premises equipment.
- Demonstrate your terminals working at their best across a 'perfect' ISDN line during trade shows, training courses or in the lab.
- Compact, lightweight and low cost.
- Provides a reliable connection with no call charges every time that you need it.



B-LinkU provides two ports with connection via S/T or U interface on each port.

The B-LinkU is a compact basic rate ISDN network simulator with 2 ports. Terminals may be connected via the U interface or the S/T interface. Both ports are completely independent allowing you to connect 2 terminals with the same interface type or one U interface terminal and one S/T interface terminal.

LED indicators on the front panel provide a clear indication of line status and activity during initial terminal connection and subsequent calls. The B-LinkU performs all of the complex call handling procedures without the need for a PBX or Switch and therefore eliminates many of the problems associated with real lines.

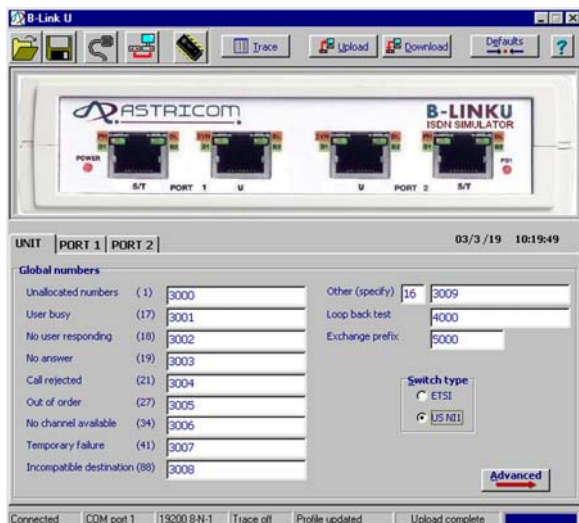

Each B-LinkU is supplied with a simple default configuration allowing you to plug and play. Intuitive Windows software supplied, allows you to easily configure and save any required changes. The software also provides access to the powerful protocol trace facility, which displays all messages transmitted and received on each line with user selectable filters for product test and development applications.

B-Link Models Available

B-LinkU - 2 active ports (either U or S/T interface)

B-Link4 - 4 basic rate ISDN S/T ports

Typical Application

Using the B-LinkU to simulate the ISDN network between two routers.



Specification

Switch Type Supported

ETSI Euro-ISDN (subset of CTR3)
Also supports SPID's (subset of National ISDN 1/2)

Ports

2 active ports using either U or S/T interface

Interface Type

2 wire U interface, 1 x RJ45 socket per port
4 wire S/T interface, 1 x RJ45 socket per port

LED Indicators

B1/ B2 Channel Active
PS1 Present - S/T Ports
SYN/PH (Physical Layer - Layer 1) Active
DL (Datalink Layer - Layer 2) Active

Configuration Interface

Serial Port - 9 way D type

PC Operating System

(Note: PC required only for configuration)
Windows 95/98/NT4/2000/XP

PS1 (Power Source 1)

The B-LinkU supplies normal PS1 (phantom power) on each of its S/T interface basic rate ports.

Power Supply

Provided with a compact mains power adapter, please state preferred model - UK, European, US, Australian.

Accessories

Each B-LinkU is supplied with:
Windows configuration software on CD ROM (includes protocol analysis and online HELP), Serial Lead, Power Adapter.

Size/Weight

15.3cm x 10.3cm x 4cm (6" x 4.25" x 1.75")
330g, (11oz)

Temperature

Operating/Storage: 0 - +40° C

Relative Humidity

90% non-condensing

*Tested to comply with FCC standards. For office use.
Specifications subject to change without prior notice. Issue 1.
©Packet Data Systems Ltd 2007.
Windows is a registered trade mark of Microsoft Corporation.*



Distributed by:

STRIL NETWORKS
Elektronikhojden 6
SE 175 43 JARFALLA
SWEDEN

Tel: +46 (0)8 795 82 42
Fax: +46 (0)8 584 704 03
email: sales@stril.com
website: www.stril.com